

1:1

MKEXCC0050

www.vieropaints.com

www.cromology.com

Viero

KRAKKE



KRAKKLE

Self-cracking decorative plaster.

Description KRAKKLE is a pre-blended plaster made of water dispersible acrylic resin, micronized inert charges, light stable pigments and specific additives. Recommended for fine decoration of interior walls where a "cracked" effect is desired.

Method of application

Base Coat

- after the wall preparation, apply a priming undercoat of VIEROQUARTZ thinned 1:1 in water in the same colour of Krackle. The use of VIEROQUARTZ as a base coat gives an initial coloured covering and protection and facilitates the application of the coating.

Steel trowel + sorghum broom/roller + brush

1. When VIEROQUARTZ is completely dry, apply an uniform layer of KRAKKLE with a small stainless steel trowel all over the surface
2. Once the first coat is dry, apply, with the same tool, a consistent layer of minimum 5 mm thick of KRAKKLE to the wall
3. Then with a sorghum broom pass over the surface vertically. The product will self-crack during the drying phase (1-2 days). The type and number of cracks will depend on the thickness of product applied and the tool used for the decoration: the higher the thickness the greater the dimension and quantity of cracks the finish will produce.

Consumption rate 3,5-4,0 Kg/m²

Interiors / Exteriors Interiors

Warning The colours shown are indicative only



CHARCOL



MUSHROOM



BLUSH GRAY



CONCRETE



PEARL




SAND




SOAP



POWDER

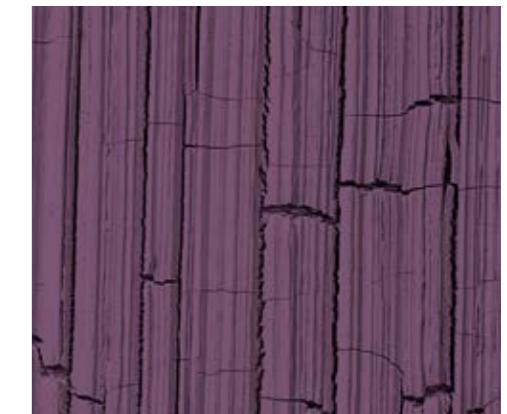

AUBERGINE

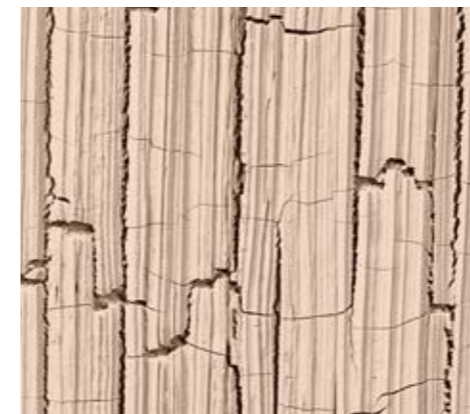

SANDAL WOOD



POMICE